



SMALL  
INFORMATION  
NETWORKS



LOCAL AREA  
NETWORKS  
(LAN)



WORK  
STATIONS



SERVERS



POINT OF SALES  
SYSTEMS (PoS)

# Dialog Vision



500-3000 VA  
Single-phase

## Highlights

- Superior protection
- High availability
- Versatility
- LCD Display
- Advanced communication
- Automatic Voltage Regulator (AVR)



The DIALOG VISION series includes the DVR (Rack version) and DVD (Dual Rack/ Tower version) with models from 500VA to 3000VA and uses sinewave digital technology.

The DIALOG VISION range, with its advanced communications and connectivity options, is the ideal solution for the most demanding of customers looking for superior protection and versatility.

DIALOG VISION is the best protection for network devices, rackmounted servers, conventional rack-mounted or tower servers, network storage systems.

### Very high protection

An Automatic Voltage Regulator (AVR)

provides stabilisation from brownouts, sag and surge voltages. EMI filters then provide further protection from spikes and transients. When the mains power supply fails, the load is powered by the inverter and receives a true sinewave supply for maximum power continuity and reliability.

The UPS also incorporates protection for PC and network, telephone line/modem connections (RJ45-RJ11).

### High availability

One EnergyShare socket for load-shedding of the least critical loads to maximise back up time for the most critical servers.

Hot swappable battery (front access) for

simple and risk-free UPS maintenance. Additional Battery Boxes (with chargers) are available for the DVD 2200 and 3000 for long back up time applications. Battery Test facility to detect deteriorating battery performance and failure. Deep discharge protection: in the case of low load long discharge periods, the end-of-discharge voltage threshold is increased as recommended by battery manufacturers, in order to avoid damaging the battery

**Versatility**

Dialog Vision Dual (DVD 1500, 2200 and 3000) can be placed directly onto the floor or mounted in 19" rackmount cabinets.

The front panel digital display can be easily pulled out and rotated to suit the installation format.

Dialog Vision includes an Emergency Power Off (EPO) input contact.

Cold Start function to allow a Dialog Vision to power up with no mains power supply present.

**Advanced communication**

- Advanced communication, multiplatform, for all operating systems and network environments: Powershield<sup>3</sup> supervision and shut-

- down software included, with SNMP agent, for Windows 7, 2008, Vista, 2003, XP, Linux, Mac OS X, Sun Solaris, Linux, VMWare ESX operating systems and other Unix operating systems
- USB or RS232 serial port (selectable)
- Slot-in SNMP network adapter card
- LCD Display.

**Features**

- ECO LINE product
- EnergyShare socket
- Surge-protected sockets for powering strong impulsive absorption loads (laser printers, etc)
- Ability to switch on the UPS in the absence of mains power (Cold Start)

- User-replaceable batteries (Battery Swap)
- USB Interface AND RS232
- Slot for communication boards
- Maximum reliability in PC protection thanks to the PowerShield<sup>3</sup> supervision and shutdown software, downloadable free of charge from [www.riello-ups.com](http://www.riello-ups.com)
- Highly reliable batteries (automatic and manually activated battery test)
- Protected against short-circuits
- Auto restart (when mains power is restored, after discharge of the batteries)
- EPO



**2-YEAR WARRANTY**

**details**

**battery box**

<b>MODELS</b>	<b>BB DVD 96-A5</b>
<b>DVD MODELS</b>	<b>DVD 2200 - DVD 3000</b>

Dimensions (mm)

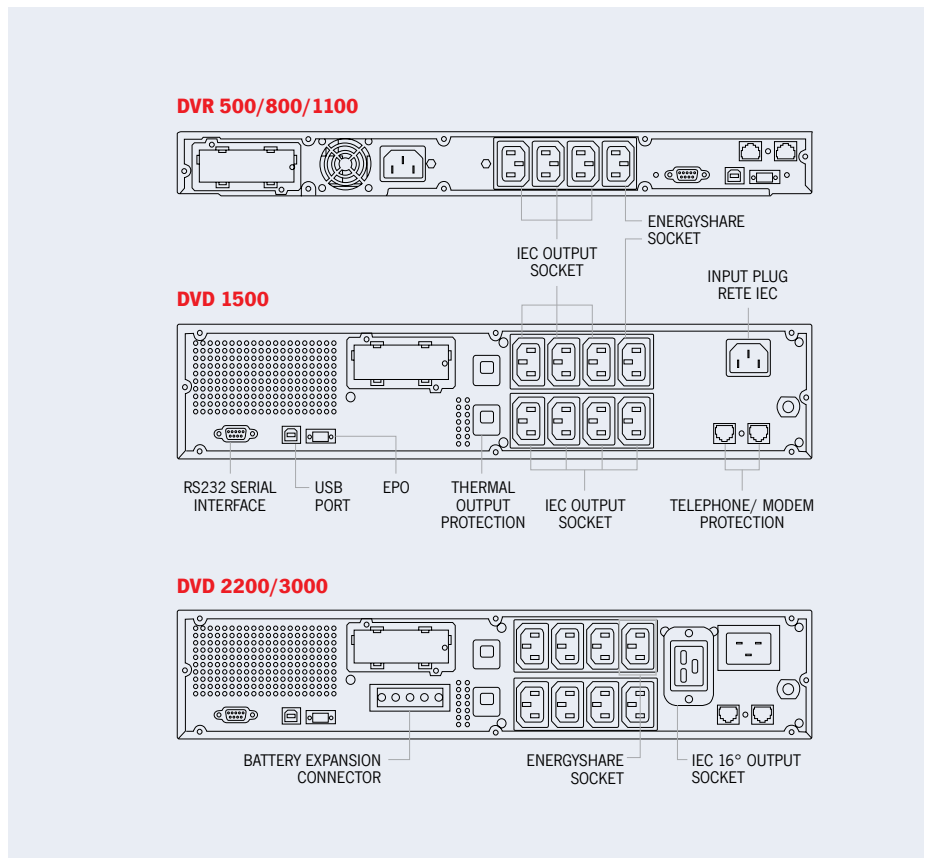


1. Remove the mimic panel by pressing the appropriate button



2. Rotate the mimic panel and insert it into position



3. Rotate the UPS 90°



4. Insert the UPS into the rack



MODELS	DVR 500	DVR 800	DVR 1100	DVD 1500	DVD 2200	DVD 3000
<b>POWER</b>	500VA/350W	800VA/540W	1100VA/740W	1500VA/1050W	2200VA/1540W	3000VA/2100W
<b>INPUT</b>						
Nominal voltage	230 Vac (200, 208, 220, 240 V selectable)					
Voltage tolerance	160 - 294 Vac					
Frequency	50 or 60 Hz with automatic selection					
Frequency tolerance	±5%					
<b>OUTPUT</b>						
Nominal voltage	230 Vac (200, 208, 220, 240 V selectable)					
Frequency	50 or 60 Hz with automatic selection					
Waveform	Sinusoidal					
<b>BATTERIES</b>						
Type	VRLA AGM lead acid maintenance free batteries					
Charging time	4-6 h					
<b>OTHER FEATURES</b>						
Net weight (kg)	12	13.5	15.6	28.7	31	32.8
Gross weight (kg)	16	18	20	32.5	36	38
Dimensions (hwd) (mm)	1U x 19" x 460			T 88 x 438 x 582 - R 2U x 19" x 582		
Packaging dimensions (hwd) (mm)	200 x 605 x 623			260 x 726 x 623		
Protection devices	Overcurrent - short-circuit - overvoltage - undervoltage - temperature - excessive low battery					
Communication	USB / RS232 / slot for communications interface					
Input sockets	1 IEC 320 C14				1 IEC 320 C20	
Output socket	4 IEC 320 C13		8 IEC 320 C13		8 IEC 320 C13 - 1 IEC 320 C19	
Regulations	EN 62040-1-1 and Directive 2006/95/EC EN 62040-2 and Directive 2004/108 EC					
Ambient temperature	0°C / +40°C					
Storage temperature	-15°C / 45°C					
Colour	Dark grey RAL 7016					
Relative humidity	<95% non-condensing					
Noise level	< 50 dBA					





#### **ITALIA**

##### **LEGNAGO, Headquarters Production and Sales Management**

Viale Europa, 7  
37045 Legnago (VR)  
Tel.: +39 0442 635811  
Fax: +39 0442 629098  
www.riello-ups.com  
riello@riello-ups.com

##### **MILANO, Production and Sales Office**

Via Somalia, 20  
20032 Cormano (MI)  
Tel.: +39 02 663271  
Fax: +39 02 66327351  
www.riello-ups.com  
riello@riello-ups.com

##### **ROMA, Sales Office**

Via Fosso della Magliana, 34/G  
00148 Roma  
Tel.: +39 06 65192125  
Fax: +39 06 65192247  
www.riello-ups.com  
rielloroma@riello-ups.com

#### **UK**

RIELLO UPS Ltd  
Unit 50 - Clywedog Road North  
Wrexham Industrial Estate - Wrexham LL13 9XN  
Tel.: +44 (0)1978 729 297 - Fax: +44 (0)1978 729 290  
www.riello-ups.co.uk / riello@riello-ups.co.uk

#### **CONSTANT POWER SERVICES Ltd**

Unit 3 - Trust Industrial Estate, Wilbury Way  
Hitchin, Herts, SG4 0UZ  
Tel.: +44 (0)1462 422 955 - Fax: +44 (0)1462 422 754  
www.cps4ups.co.uk / info@cps4ups.co.uk

#### **FRANCE**

RIELLO ONDULEURS s.a.r.l.  
SIEGE SOCIAL:  
2/4 Rue du Bois Chaland,  
ZAC du Bois Chaland - 91090 Lisses  
Tel.: +33 (0)1 60 875454 - Fax: +33 (0)1 60 875450  
www.riello-onduleurs.com - ventes@riello-onduleurs.com

#### **SALES SUD**

147 Avenue M. Mérieux,  
Parc de Sacuny, Park Avenir 1 - 69530 Brignais  
Tel.: +33 (0)4 72 177108 - Fax: +33 (0)4 78 351422  
www.riello-onduleurs.com - contact@riello-onduleurs.com

#### **ESPAÑA**

RIELLO ENERDATA s.l.  
C/ Labradores, 13 Urb. Prado del Espino  
28660 Boadilla del Monte, Madrid  
Tel.: +34 (0)91 63 33 000 - Fax: +34 (0)91 63 21 793  
www.riello-enerdata.es / enerdata@riello-enerdata.es

#### **RIELLO ENERDATA s.l.**

C/Aviación 18 Edificio Morena y Vallejo 1  
1º planta pol. Ind. Calonge  
41007 Sevilla ESPAÑA  
Tel. +34 955 040044  
Fax +34 955 040041  
www.riello-enerdata.es / enerdata@riello-enerdata.es

#### **RIELLO TDL s.l.**

c/ Terra Alta, 88 - P.I. "Can Carner"  
08211 Castellar Del Vallès, Barcelona  
Tel.: +34 (0)93 74 71 210 - Fax: +34 (0)93 71 46 562  
www.riello-tdl.com / comercial@riello-tdl.com

#### **DEUTSCHLAND**

RIELLO UPS GmbH  
Siemensstr. 12  
21465 Reinbek bei Hamburg  
Tel.: +49 (0)40 727 57-06 - Fax: +49 (0)40 727 57-189  
www.riello-ups.de / info@riello-ups.de

#### **INDIA**

RIELLO PCI INDIA PVT. LTD.  
Prime Group Building,  
11/5B, Pusa Road,  
New Delhi - 110 005.  
Phones: 91-11-41 888 999 (30 lines), 41 888 888,  
2576 2562-64, 2576 2552-53, 2581 3338  
Fax: 91-11-2575 5815, 2582 1623

#### **PEOPLE'S REPUBLIC OF CHINA**

Riello UPS (Asia) Co., Ltd  
28F, No. 500, Fute Dong Er Road, Waigaoqiao Free Trade  
Zone, Pudong District  
200131 Shanghai  
Tel: +86-21-50464748 - Fax: +86-21-50464648  
www.riello-ups.com - info@riello-ups.cn

#### **Riello UPS Asia Beijing Office**

No.418, 4F, Block A, Gaode Platza, No.10,  
Huayuan Dong Road, Haidian District  
Beijing  
Tel: +86-10-82038861 / 8862  
Fax: +86-10-82038863

#### **Riello UPS Asia Guangzhou Office**

Address Unit 1507 East Building, Dongshan Square,  
No. 65, Xianlie Zhong Road, Yuexiu District, 510095,  
Guangzhou.  
Tel: +86-20-28848001  
Fax: +86-20-28848002

#### **ASIA PACIFIC**

##### **SINGAPORE REPRESENTATIVE OFFICE**

No. 138, Robinson Road - The corporate office #14-06  
068906 SINGAPORE  
Tel. +65 6323 4131 - FAX. +65 6323 4212  
www.riello-ups.com - info@riello-ups.sg

